


# HP Color LaserJet 1600 / 2600 / 2605 series ETB removal and replacement


- 1 Remove the main cassette tray (Tray 2).



- 2 Remove three screws: two from the right cover assembly and one from the left cover assembly.

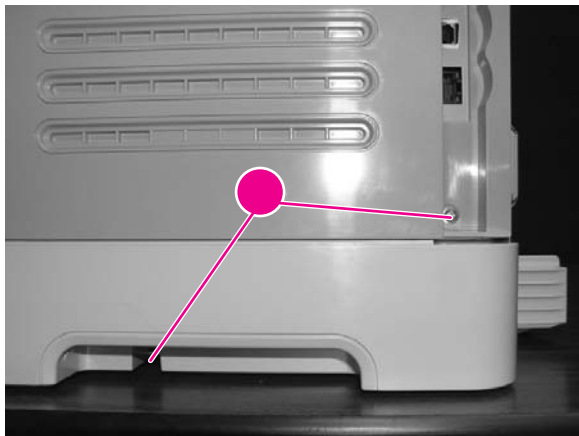

Two (2) screws on right cover assembly


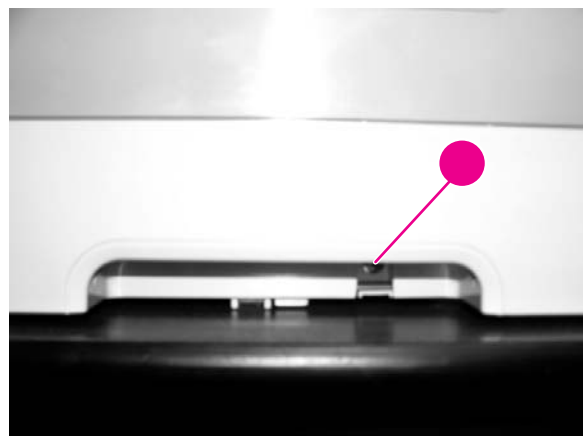


One (1) screw on left cover assembly

- 3 Open the front door.



- 4 Remove the right cover, carefully twisting the front edges of the side covers outward to remove.

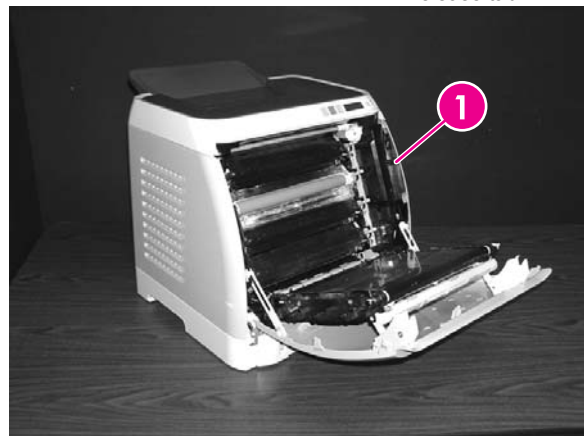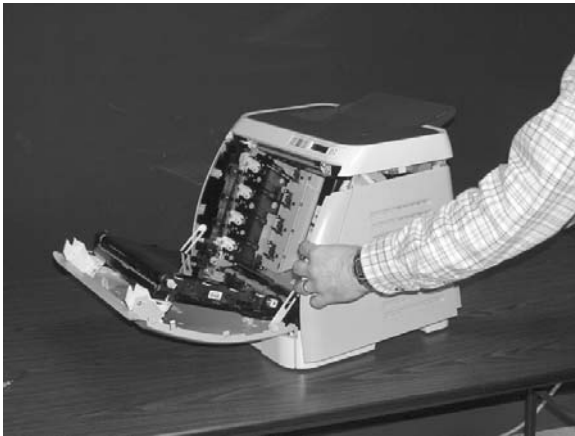


**NOTE** To make the removal of the right cover assembly easier, release the tab on the inside of the cover.

- 5 Remove the left cover.




- 6 Squeeze the white link lever on the left side.

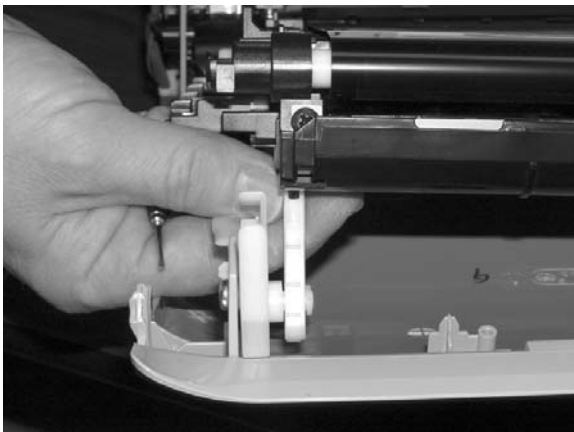

- 7 Remove the screw on the right white plastic catch, and then remove the plastic catch.




- 8 Close the ETB.

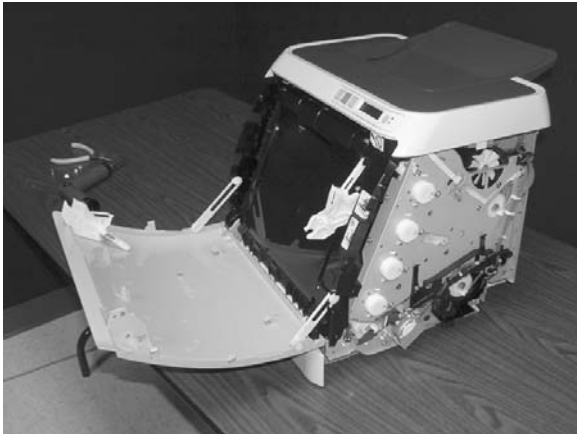


- 9 Remove the small black cable cover on the left side of the printer by carefully snapping it out of place.



- 10 Remove one (1) grounding screw from the ETB harness.

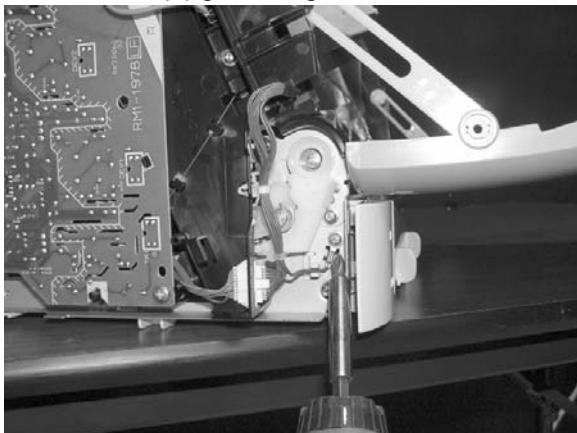


- 11 Pull out the white wire holder by pushing it up.

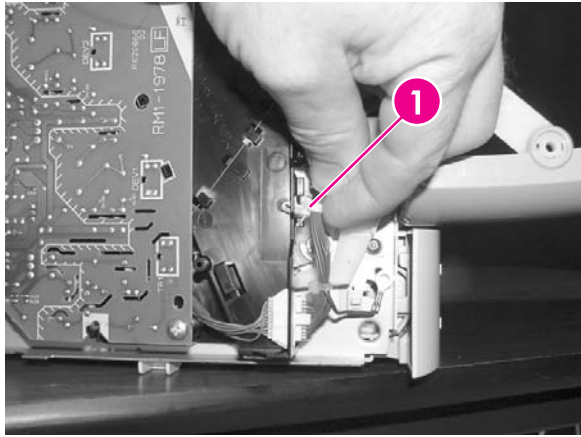


White wire holder

- 12 Pull out the ETB connector.

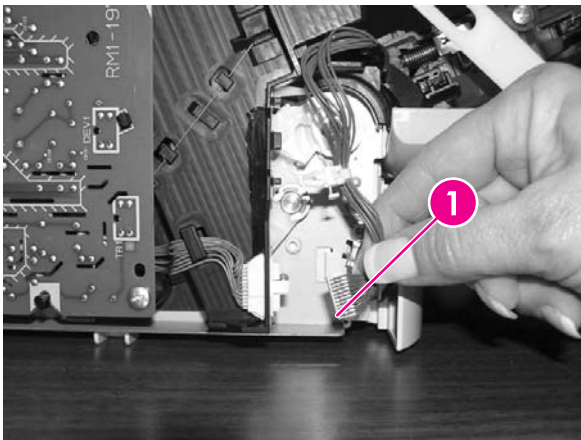


ETB connector


- 13 Remove one (1) screw from each hinge cam on both sides.

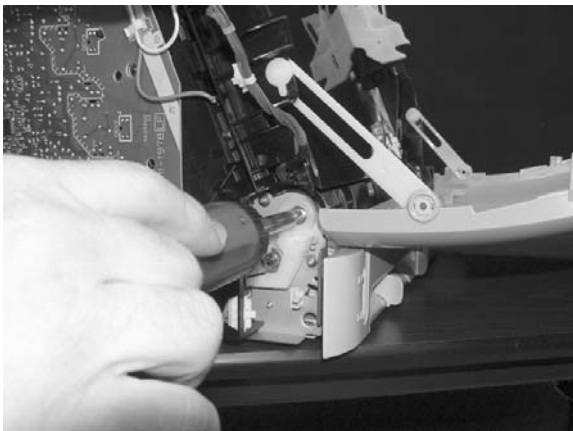


- 14 Using needle-nose pliers, remove the hinge left cam and the right hinge cam.

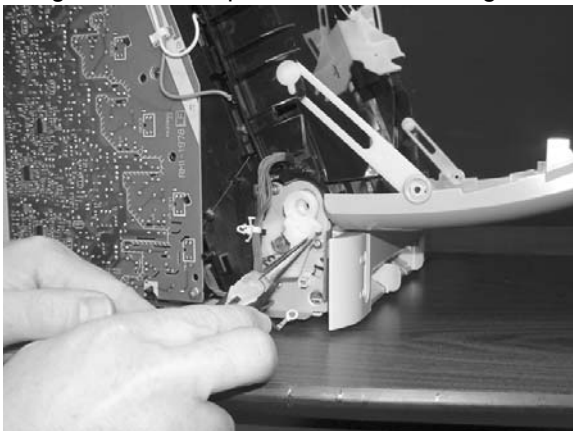

15 Remove the ETB.

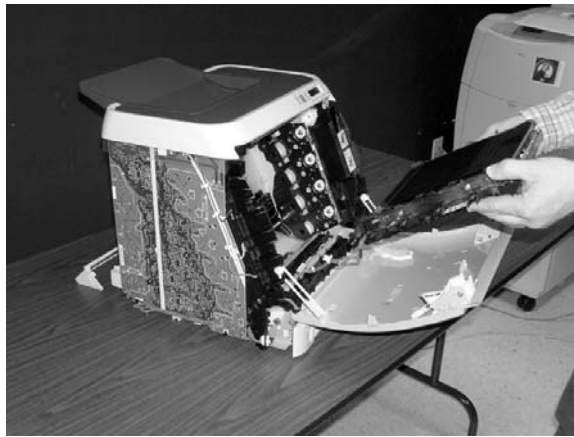

16 Align each foot of the ETB with the respective holes, securing the right side first, and then the left side.

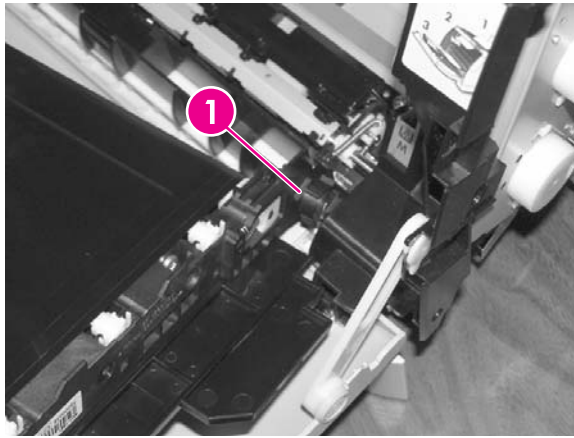


17 Complete replacement by following steps 1 through 14 above in reverse order.



#### NOTE

When replacing the right cover, align the tabs on the upper edge of the right cover and lower edge of the face-down cover with their respective slots.

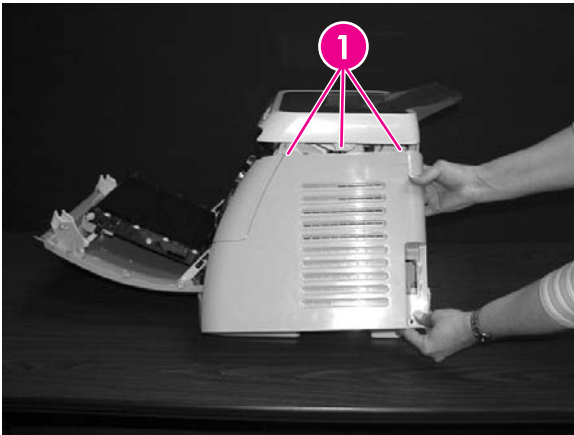

### HOW TO CALIBRATE THE COLOR AFTER A NEW TRANSFER BELT IS INSTALLED

After replacing the Transfer Belt, it's a good idea to perform a Color Calibration (or even several calibrations in a row, if you are having print quality issues.) Calibrations help with print quality by aligning the color tones, the drums, and the color plane.

- Press Left or Right Arrow until you see "System Setup", then press Checkmark button.
- Press Left or Right Arrow until you see "Print Quality", then press Checkmark button.
- Press Left or Right Arrow until you see "Calibrate Color", then press Checkmark button.
- Press Left or Right Arrow until you see "Calibrate Now", then press Checkmark button.
- Press Checkmark button once more to confirm "Calibrate Now".

If a Calibration takes longer than 4 minutes, some of the toner cartridges may be faulty.

If multiple Calibrations do not help print quality, some of the toner cartridges may be faulty.